


# TRIUMPH® 4815

Powerful, semi-automatic cutter with electric blade drive, manual spindle clamp, and EASY CUT blade activation.



*Shown with optional side tables*

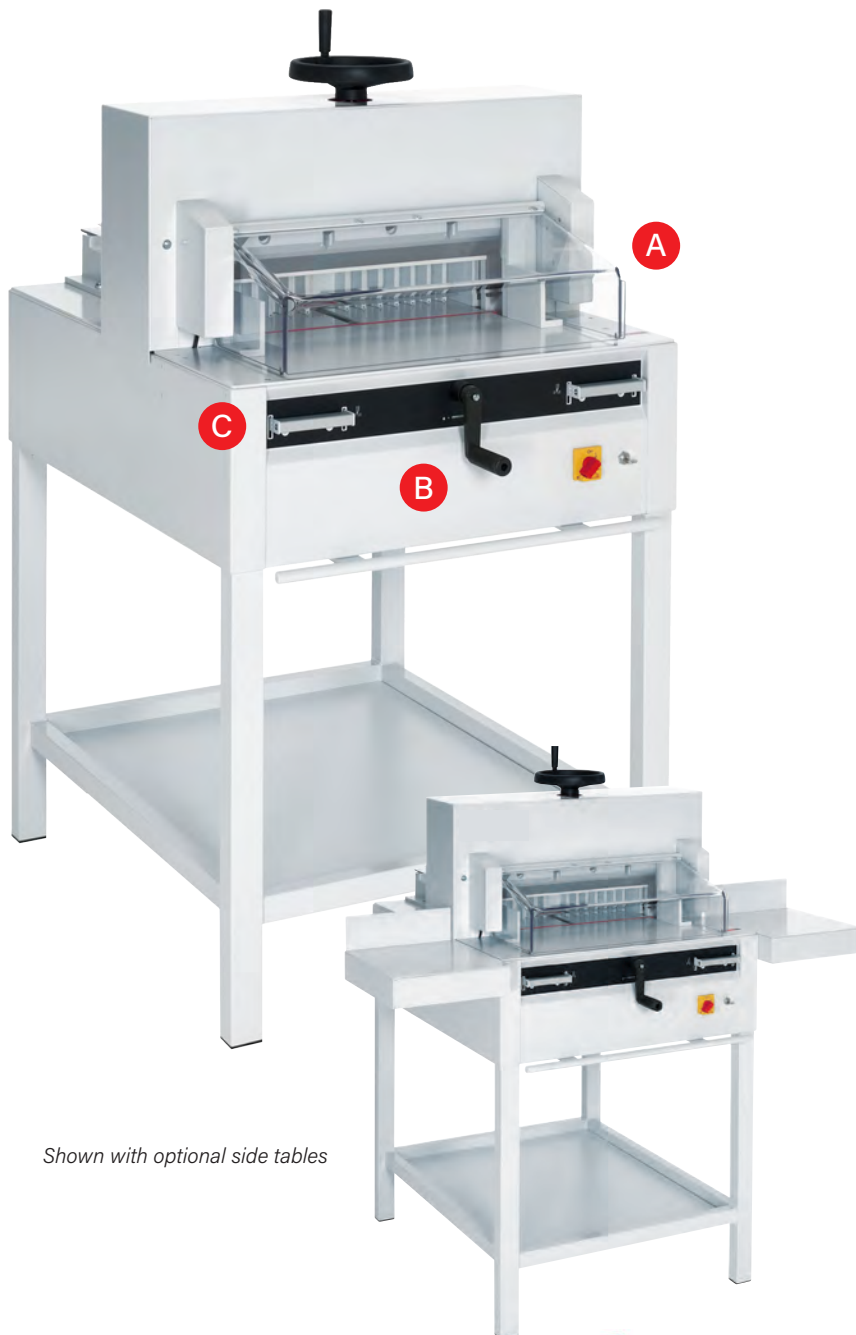

- A TRANSPARENT SAFETY GUARD**  
A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.
- B BACK GAUGE HAND CRANK**  
The calibrated hand crank is used to set the spindle-guided back gauge.
- C EASY CUT BLADE ACTIVATION BARS**  
Patented EASY CUT blade activation bars ensure true, two-hand operation.
- D SAFE BLADE CHANGES**  
Blade changes can be made without removing the machine covers. The handy blade changing device covers the cutting edge of blade.

# TRIUMPH®

# 4815

- Ergonomic, 37" working height
- Electric blade drive
- Spindle-guided back gauge with calibrated crank
- Front table digital display (cm or inches) for precise back gauge positioning
- Bright, LED optical cutting line
- Safety cover on rear table
- Main switch and safety lock with key
- 24 volt controls (low voltage)
- Patented IDEAL safety drive
- Automatic blade return from every position
- Disc brake for instant blade stop



## Digital Display

The LED measurement display ensures precise positioning of the back gauge and can be set to cm or inches.



## Tool Holder

Convenient, drop-in tool holder is located on the rear of the machine and keeps all tools necessary for routine maintenance (including blade changes) within reach.

### Specifications:

|                            |                         |
|----------------------------|-------------------------|
| Cutting width              | 18 5/8"                 |
| Cutting height             | 3"                      |
| Narrow cut                 | 1"                      |
| Dimensions (D x W X H)     | 41 1/2" x 30" x 55 1/2" |
| Width with side tables (W) | 53"                     |

