





FD 262 Tabber

SINGLE-HEAD TABBING SYSTEM

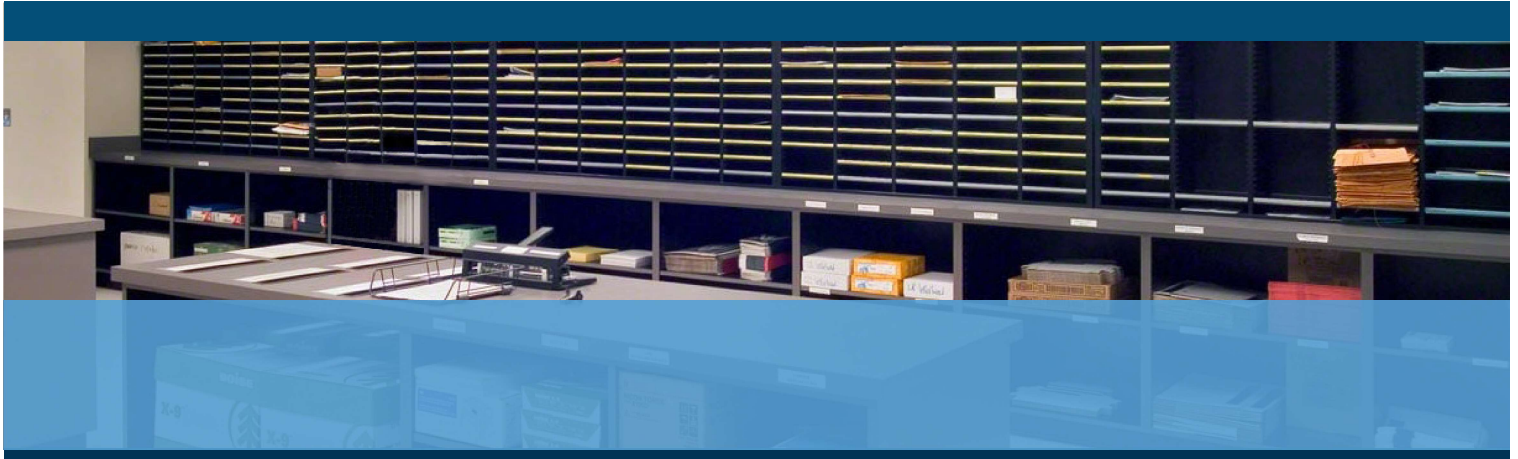

*Various Tab Positions,
Multiple Passes*

Feed Direction

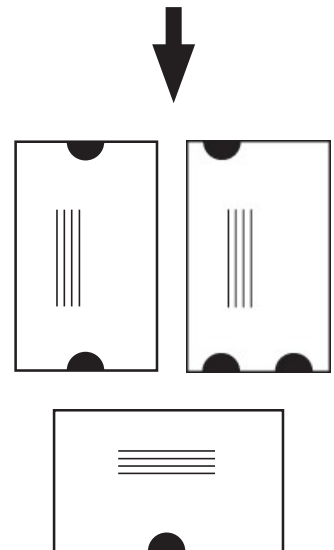

- Tabs up to 12,000 pieces per hour
- “Crash tab” technology
- Integrated bottom feeding for continuous operation
- Handles media up to 5/32” thick
- Built-in waste take-up spool

FORMAX[®]

www.formax.com


Local Dealer:

 PaperFolder.com

The **FD 262 Single-Head Tabber** uses “crash tab” technology to apply tabs to folded mail pieces, and is designed to meet all USPS requirements for mailing and automation discounts. The FD 262 tabs up to **12,000 pieces per hour** (8 1/2” tri-folds), and handles **media up to 17” wide, up to 5/32” thick**. Its advanced design includes an **integrated bottom feeder** allowing for continuous operation, and a **built-in waste take-up spool** to reduce down time. The controls include a **5-digit resettable LCD counter** and a **tab sensitivity control** to adjust for tab stock density. Various tab stocks can be used, including translucent, paper, and clear, in sizes up to 1 1/2” in diameter. An optional 3-foot drop-stacking conveyor is also available.




User-Friendly Controls
5-digit resettable LCD counter and a tab sensitivity control




Easily Accessible Knobs
Easily access knobs to adjust tab placement



Integrated Bottom Feed
Holds up to 200 tri-fold pieces, designed for continuous operation



Applicator and Rollers
Ensure tab is tightly folded and sealed to the media



Optional Drop-Stacking Conveyor
3-Foot conveyor/stacker offers adjustable speed from 0 - 124 fpm

STANDARD FEATURES

- Tabs up to 12,000 pieces per hour
- Integrated bottom feeder
- User friendly controls
- 5 digit LCD counter
- Built-in waste take-up spool
- Tab sensitivity control
- Handles media up to 17” wide
- Uses rolls of up to 10,000 tabs
- Continuous media loading
- Easily accessible knobs for tab placement
- Applicator and rollers ensure tabs are tight
- Made in USA

OPTIONS

- FD 282-30 Drop-Stacking 3-Foot Conveyor

SPECIFICATIONS

Speed	Up to 12,000 pieces per hour
Feeder Capacity	Up to 200 tri-folds, integrated bottom feeder for continuous operation
Media Size	3” to 18” L (76 x 457mm) 5” to 17” W (127 x 432mm)
Media Thickness	Up to 5/32” (4mm)
Tab size	5/8” to 1 1/2” (16 to 38mm)
Tab Materials	Translucent, paper, clear
Tab Sensitivity Control	Adjusts for density in tab/wafer seals
Tabs Applied	1 tab per pass
Tab Roll Capacity	Up to 10,000 tabs
Tab Roll Size	Max roll diameter: 9” Core diameter: 3”
Counter	5-digit LCD, resettable
Duty Cycle	Up to 30 million addresses or 500,000 per month over 5-year cycle
Dimensions	25” W x 22” H x 15.5” D (64 x 56 x 39cm)
Weight	40 lbs (18kg)
Power	120VAC, 50/60Hz